




Gen2 Quick Start Guide

Physical Preparation

1. Mount the pedals as desired. The full setup guide has more details.
2. Attach the slave cylinder assembly to the bracket as per fig 1. GTpro3 pedals shown, GTpro1 pedals are similar.
3. Open brake reservoir(s) and remove stoppers as per fig 2. GTpro3 has 2 reservoirs, GTpro1 has only 1.
4. After the pedals have sat upright for 15 minutes, cut the straps holding the brake pedal.
5. Do not lay the brake pedal on its side after this point.
6. Mount the PCU within reach of the sensor cables and within reach of the driver if possible. The mounting holes are suitable for screws up to ¼" or 6mm diameter.

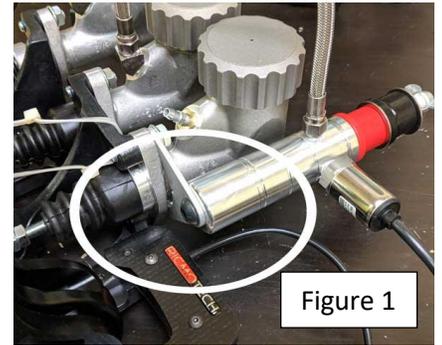


Electronic Preparation

1. Discharge any static electricity from your body by touching grounded metal such as your PC case before handling pedal electronics.
2. Connect each pedal sensor to the PCU as shown in Figure 3.
3. Connect the provided USB cable to the PC and the USB connector on the PCU.
4. The PCU will perform a self-test and emit four beeps.



Software Setup


1. Go to ricmotech.com/gtpro.
2. Click to download SmartPanel Software zip file.
3. Extract SmartPanel.exe from zip file to the desktop.
4. Double-Click SmartPanel icon to run the software.

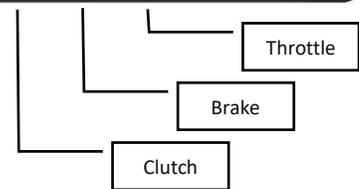

Checking Sensor Calibration

Check that the Final value for each pedal is locked at 0 when the pedal is at rest and that Final value stays at 1023 when the pedal is fully pressed. If any pedal is not calibrated to go from 0 to 1023 then perform the following steps for the pedals:

1. Leave the pedal at rest for 3 seconds then click Auto Min.
2. Press the pedal fully for 3 seconds, click Auto Max, then release the pedal.
3. Click the Save to Baseline button.

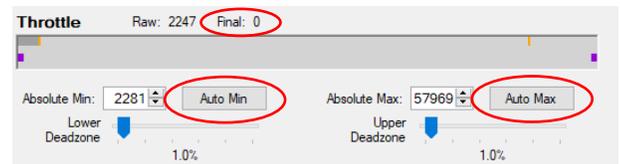

Full Manuals and Software are available at <https://www.ricmotech.com/gtpro>